




Global Heating Bar

Electrical-heating bars

Remarkable heating bar constructed of an aluminium profile to withstand the rigours of daily use. Global electric heating bars are recommended for bonding veneer, plastic edges and for thermoforming Solid Surface materials and thermoplastics.

Each bar is equipped with a continuously adjustable thermostat to suit the particular application and is available with an over-length cover for energy saving and occupational safety.

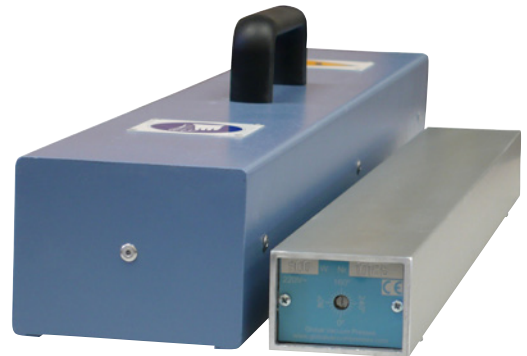

Product information

- ▶ Manufactured from thermomechanically resistant aluminium profiles
- ▶ Anodised in silver, scratch and wear resistant
- ▶ Continuously adjustable thermostat
- ▶ Temperature control via countersunk
- ▶ Heating bar all side usable, cross section 64 x 46 mm
- ▶ Operating temperature from 0 - 200°C
- ▶ Cover for energy saving and homogeneous heat distribution
- ▶ CEE European standard three pin plug, including 3m cable
- ▶ Electrical connection 220 V / 50 Hz / 1~

Code

Bar	Cover	Bar+Cover	Length	Electr. Power
GHB-0600	GHBC-0600	GHBS-0600	60 cm	500 W
GHB-1100	GHBC-1100	GHBS-1100	110 cm	700 W
GHB-1600	GHBC-1600	GHBS-1600	160 cm	800 W
GHB-2100	GHBC-2100	GHBS-2100	210 cm	1100 W
GHB-2600	GHBC-2600	GHBS-2600	260 cm	1200 W
GHB-3100	GHBC-3100	GHBS-3100	310 cm	1450 W
GHB-3600	GHBC-3600	GHBS-3600	360 cm	1550 W
GHB-4100	GHBC-4100	GHBS-4100	410 cm	1700 W

Conditions

Delivery time: 1 Week
 Shipping: Ex Works 46113 Moncada, Spain
 Warranty: 2 Years under normal use
 Technical characteristics reserved to change without notice.

Nabuurs Developing S.L.

Pol. Industrial Moncada III | Avda. Pared del Patriarca 4 | 46113 Moncada | Spain
 Tel: +34 96 152 6000 | global@nabuurs.com | www.globalvacuumpresses.com
 VAT: ES-B96939095